


MUK Series

LINEAR ACTUATOR TECHNOLOGY

SCREW DRIVEN LINEAR ACTUATOR

FEATURES & BENEFITS


- Incorporates two 20 mm recirculating ball profile rail guideways
- Load capabilities up to 11200 N
- Single or dual carriage options available
- Class 7 (52 $\mu\text{m}/300\text{ mm}$) travel accuracy ball screw is standard, consult factory for other options
- Compact aluminum profile incorporates t-slots for easy sensor mounting

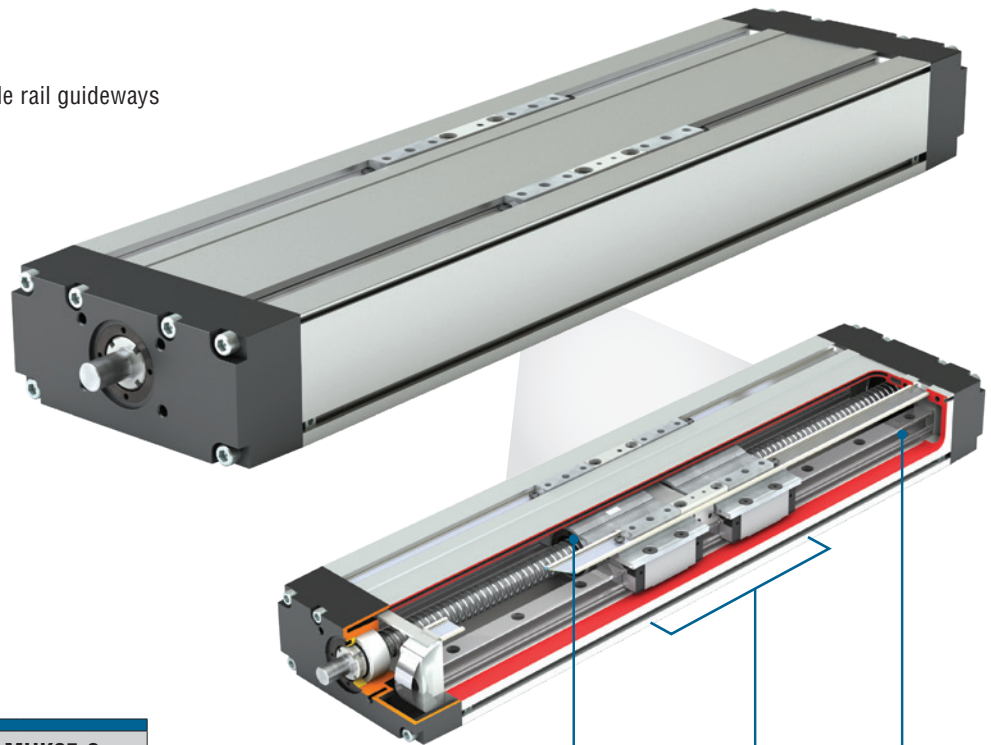

Ball screw driven

Dual carriage configuration shown, equipped with four profile rail bearing blocks

Incorporates two parallel 20 mm recirculating ball profile rail guideways




TECHNICAL DATA


SIZE		MUK65-1			MUK65-2			
		SINGLE CARRIAGE			DUAL CARRIAGE			
Carriages		1			2			
Max Body Length	mm	1750*			1750*			
Min Body Length	mm	150			250			
Pitch	mm	5	10	20	5	10	20	
Screw Diameter	mm	20			20			
Base Weight	kg	2.2			2.8			
Add per 100 mm	kg	1.01			1.01			
Inertia Moment	lx	90			90			
	ly	687			687			
Max Load	fx	n	3597	2996	1798	3597	2996	1798
	fy	n	8500			11200		
	fz	n	8500			11200		
Max Moments	mx	nm	550			950		
	my	nm	330			1150		
	mz	nm	330			1150		

* Contact factory for lengths between 750–1750 mm.
Consultations available for lengths longer than 1750 mm.

Note: The moments and loads above are maximum values. For further information, contact PBC Linear. Class 7 (52 $\mu\text{m}/300\text{ mm}$) travel accuracy ball screw is standard.

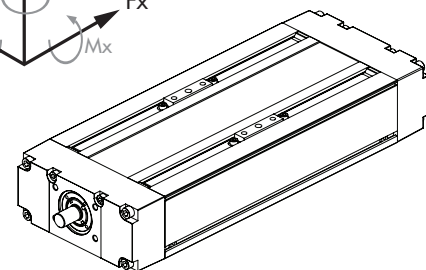

DIMENSIONAL INFORMATION

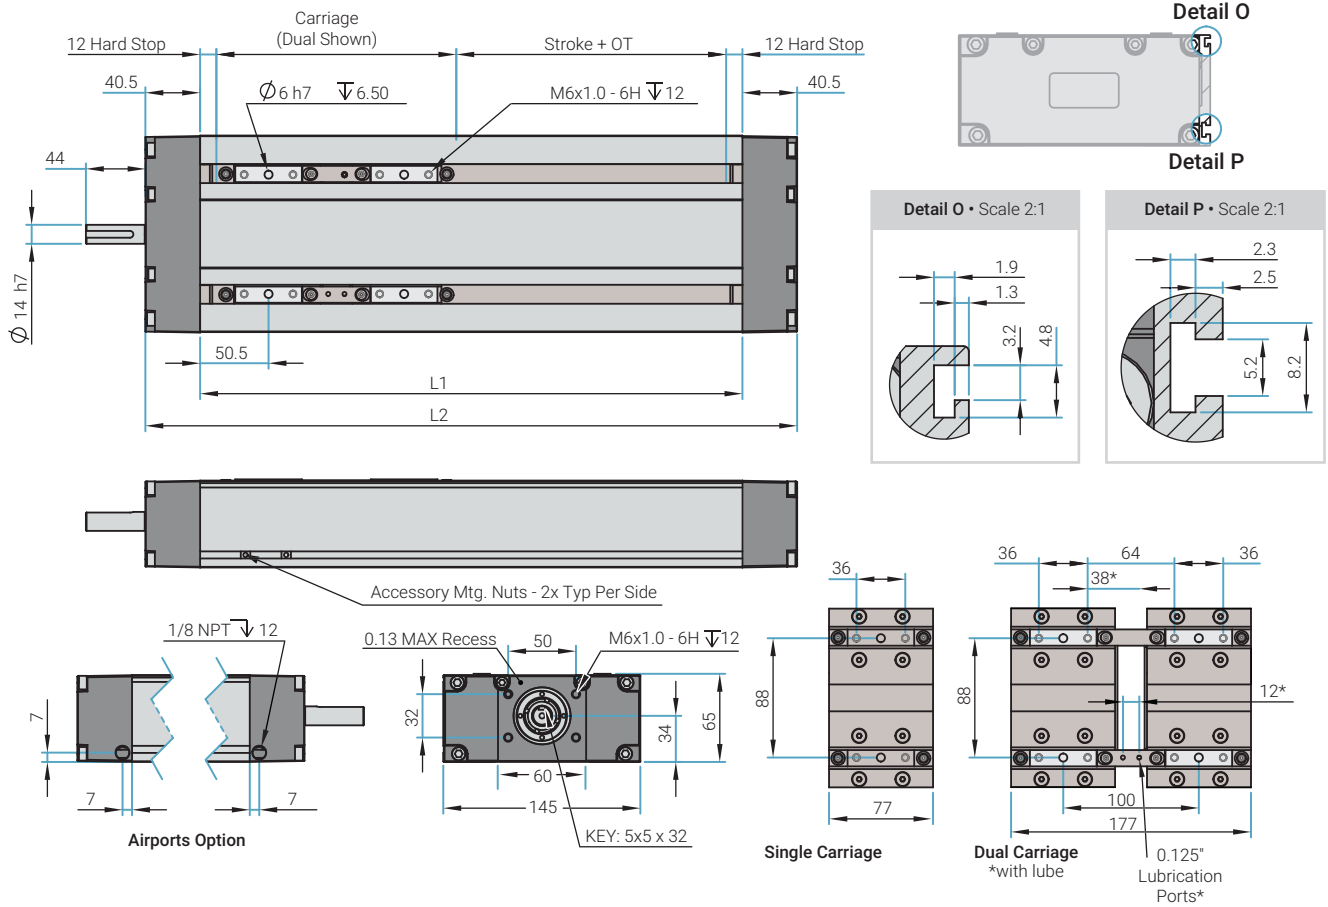

DIMENSION	SINGLE CARRIAGE	DUAL CARRIAGE
L1 (Body Length)	Stroke + 77 + 24 ¹ + 40 ²	Stroke + 177 + 24 ¹ + 40 ²
L2	Body Length + 81	

1 = 24 mm hard stop (12 mm each end)
 2 = 40 mm recommended over travel

ORDERING INFORMATION

MUK	65	-	0500	-	20	-	05	-	1	-	R	-	A	-	A
SERIES	SIZE		BODY LENGTH		SCREW DIAMETER		SCREW PITCH		CARRIAGES		SCREW TYPE		SHAFT VERSION		AIR PORTS
MUK	65 x 145		MAX 1750 mm*		Ø20 mm		05 = 5 mm 10 = 10 mm 20 = 20 mm		1 = Single 2 = Dual 3 = Dual + Lube Ports		Rolled Screw with Ball Recirculating		A = Without Key Shaft B = With Key Shaft		Ø = None A = Airport

* Contact factory for lengths between 750–1750 mm. Consultations available for lengths longer than 1750 mm.



北京润诚时代科技有限公司

自动化事业部

地址：北京市朝阳区汤立路218号C座968室

邮编：100012

电话：010-84450370

传真：010-84450371

网址：www.runcheng.net